

Portable Ultracapacitor Tester



Maintenance
Solutions



BONITRON


M3628UMT Series

The M3628UMT ultracapacitor tester is designed to determine the capacitance and ESR of modules up to 170V. A full test cycle delivers an adjustable constant current to charge the test capacitor to a desired voltage, holds the test voltage, then discharges at a constant current. It can also be operated solely as a voltage source or current source/sink.

Product Highlights

- Charges, discharges, measures ultracapacitors
- Variable output voltage: 10 - 170 V
- Digital control interface
- Operates from standard 90 - 132VAC supply
- Tough impact and weather resistant case

Industry Applications

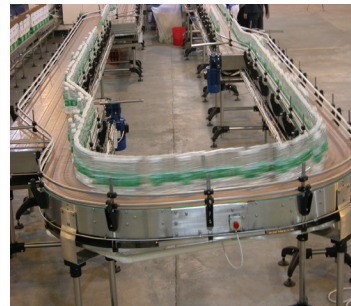

Assembly Lines | Centrifuges | Conveyors | Cranes | Dynamometers | Elevators | Hoists | Pick and Place | & More!



www.bonitron.com



615-244-2825

info@bonitron.com



Model Number Selection

	Model Number	Input Voltage	Input Frequency	Max Output Voltage	Max Charging Current	Max Load Capacitance
	M3628UMT-U07-120	90 - 132 VAC	47-63Hz	170 V	7 A	2000 F
	M3628UCT-D30-240	180 - 264 VAC				

Advantages

- Accurate capacitance and ESR measurement
- Overcurrent and over temperature protection
- Quick charge and discharge of ultracapacitors
- Portable - case on wheels

Benefits

- Measuring aging capacitors helps avoid unnecessary preemptive replacement
- Quick verification of both new and stored capacitors
- Decreases maintenance time and cost

Dimensions



Specifications

Max Test Cycle Time.....180 minutes
Controls, Displays..... 6 - Button Interactive Digital Display
Dimensions.....9.0"H x 22.0"W x 14.0"D
Weight.....30 lbs.
Operating Temp.....0°C to 40°C
Storage Temp.....-20°C to +65°C
Humidity.....Below 90% non-condensing
Atmosphere.....Free of corrosive gas and conductive dust

Scan for more information

